


HORSE WALKER

Upside-Down Horse Walker



Horses need exercise!

In the wild horses move between 30 and 50 km on a daily basis while they are grazing. In order to keep your horses healthy and strong they do need to be able to move around enough. A lack of exercise influences the horses' mental state negatively and often results in problems of their locomotor system. The exercise with a rider is often not enough therefore we need to consider other options in order to keep our four-legged friends healthy. Our horse walkers do exactly that they keep horses happy by offering exercise which serves the purpose of increasing and maintaining health and strength. The Columbus horse walkers are especially renowned in professional settings for their effective performance, high-quality materials and safety measures. Muscle strength, vitality and stamina are trained with the right intensity.

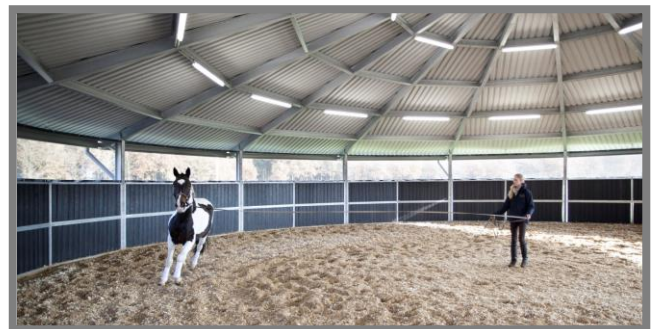

Double benefits – clever and neat!

Our upside-down horse walker with central round-pen offers you the possibility to make use of the available space perfectly. Furthermore, you are able to train your horses properly even in bad weather conditions.



The upside-down horse walker

A high-quality technical concept which consists of strong support arms and a classic drive unit with a cover. Our horse walker has by default a variety of safety measures as for example the light weight, impact-resistant and equine friendly pushers with bars.

-We also offer the fitting track surfaces and round-pen footings-

HORSE WALKER

Upside-Down Horse Walker



Product Details Control Panel WBC 2.1 and upside-down horse walker

Standard Control Panel WCB 2.1

Speed	adjustable with speedometer (P) adjustable with speedometer (V) 16 km/h
Max. Speed	automatic left right
Direction	Setting 1 L P/ R P Setting 2 L P/ R P/ L V/ R V Choice between 5/10/15 min. Setting 1 L P/ R P Setting 2 L P/ R P/ L V/ R V
Time interval programmable	IP 65
IP certification	230 Volt 50 Hz
Connection voltage	1,5 m cable and plug
Power connection	pin plug IP65 connection
Connection of system	yellow/red switch
Emergency stop	material impact-resistant polyester
Control panel	25x30x17cm
Dimensions	inclusive
Mounting brackets	on/of switch for low current system
Optional	



- Standard walk-trot control
- Elektronik break system
- Safety Slip System
- Silent during operation
- Power consumption 0,6 kW/h
- Industrial drive
- Various safety measures
- Low maintenance [^]
- Equipped with strong support bearing
- All steel parts are galvanized according to German standards
- CE- certified
- Roof constructions are calculated considering snow load

